



SERIES AP 32

METAL SEATED 1/4 INCH DIAPHRAGM VALVE

Pneumatically (NC) or manually actuated

- Vacuum to 508 psig (35 bar)
- Stainless steel 316L VAR secondary remelt
- All metal wetted parts for increased compatibility with ClF_3 and F_2
- Surface finish
15 Ra max/10 Ra avg (10, 7 & 5 Ra max options)
- Pneumatically actuated NC (normally closed)
- Manually actuated, multi-turn and 1/4 turn
- All metal, no wetted plastic or polymer
- Indicating switch option (AP 3200 and 3202)
- Installation and operating instructions available at www.aptech-online.com in the Tech Briefs section

Operating Parameters — all valves

Inlet pressure	AP 3200, 3225, 3260 AP 3202, 3262	vacuum to 125 psig (9 bar) vacuum to 508 psig (35 bar)
Outlet pressure		vacuum to inlet pressure
Proof pressure		150% of operating pressures
Burst pressure		300% of operating pressures

Other Parameters — all valves

Inlet /outlet connectors	1/4 or 3/8 inch face seal or tube weld
Flow coefficient (Cv)	0.27, $X_T = 0.7$
Internal volume	0.06 in ³ (1.07 cm ³)
Operating temperature	-40° to +212°F (-40° to +100°C)
Surface finish	15 µin Ra max / 10 µin. Ra avg. (0.4/0.25 µm) standard; 10 µin (0.25 µm); 7 µin (0.18 µm); and 5 µin (0.13 µm) Ra max optional
Inboard leakage	2 x 10 ⁻¹⁰ sccs
Outboard leakage	2 x 10 ⁻⁹ sccs He at 125 psig
Leakage across seat	1 x 10 ⁻⁶ sccs He at 125 psig inlet pressure

Other Parameters – AP 3200

Actuation port	1/8 inch NPT, top port
Actuation pressure	70 – 110 psig (4.8 – 8.3 bar)
Status	Normally closed (NC)

CAUTION: Metal seated valves are more prone to across the seat leaks than soft seated valves.




Materials

Series AP 32 S	
Wetted Parts	
Body	SS 316L secondary remelt
Finish	electropolished and passivated
Diaphragm	Ni-Co alloy / UNS R30003

All specifications subject to change without notice

UNCOMPROMISING QUALITY, PERFORMANCE AND RELIABILITY


DIMENSIONAL INFORMATION

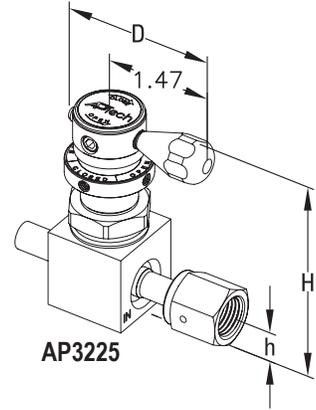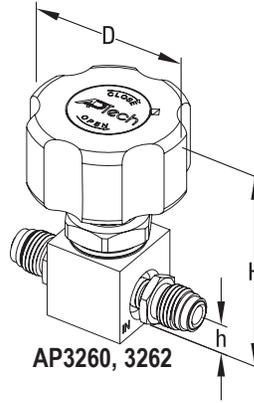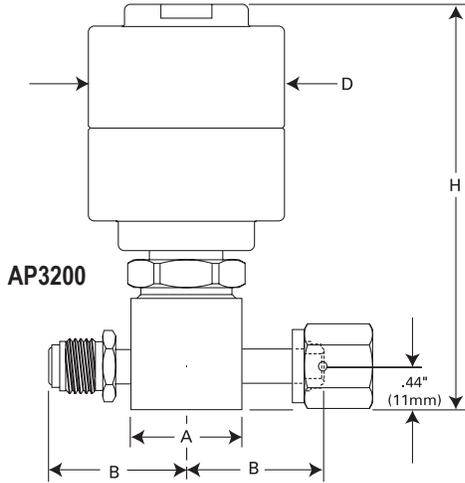

MATERIAL	Connection	A		B		C	
		in.	mm	in. [±.01]	mm	in. [±.01]	mm
S	FV4, MV4	1.12 sq.	28	1.39	35	–	–
	TW4	1.12 sq.	28	–	–	1.06	27
	FV6, MV6	1.12 sq.	28	1.93	49	–	–
	TW6	1.12 sq.	28	–	–	1.325	34

VALVE	D		H	
	inch	mm	inch	mm
AP3200	ø1.98	50.3	4.10	104
AP3202	ø1.98	50.3	4.10	104
AP3260	ø2.12	53.8	3.00	76
AP3262	ø2.12	53.8	3.00	76
AP3225	2.04	51.8	2.94	75

All dimensions in inches (mm). Metric dimensions are for reference only.

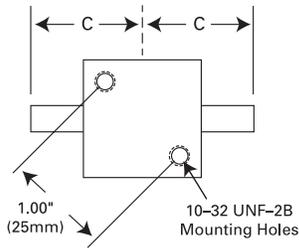

Please refer to Series AP 30, 35 & 36 or Series AP 45 & 46 data sheets for porting configuration options.

PORTING CONFIGURATIONS

CAUTION: Product selection is the sole responsibility of the user, regardless of any recommendations or suggestions made by the factory. The user shall make selections based upon their own analysis and testing with regard to function, material compatibility and product ratings. Proper installation, operation and maintenance are also required to assure safe, trouble free performance.

ORDERING INFORMATION

Sample Order Number

AP 3200SM 2PW MV4 MV4

AP 3200 | Series

AP 3200 = Pneumatic, NC
 AP 3202 = Pneumatic, NC
 AP 3260 = Manual, multi-turn
 AP 3262 = Manual, multi-turn
 AP 3225 = Manual, 1/4 turn lever

MV4 MV4 | Connections
 Inlet / Outlet

MV4 = 1/4 inch face seal male
 FV4 = 1/4 inch face seal female
 TW4 = 1/4 inch tube stub weld
 (3/8 connectors optional)

S | Material

S = Stainless steel (SS)

| Options

1.75 = 1.75 inch face to face TW4
 P = Panel Mount (AP 3225, 3260, 3262 only)*
 IS = Indicator Switch (AP 3200, 3202 only)**
 SC = Short bonnet

M | Surface
 Finish
 Options

M = 10 µin. Ra max
 V = 7 µin. Ra max
 X = 5 µin. Ra max

*Panel hole 0.78 inch diameter

**Refer to operating manual for further switch information

2PW | Ports

2PW = 2 ports butt weld
 3PW = 3 ports butt weld
 4PW = 4 ports butt weld

Refer to Series AP 30, 35 & 36 or
 Series AP 45 & 46 data sheets
 for selection.

AP Tech has product options and variations which are not documented in data sheets. If you have a model number that is not defined by the ordering information, please consult the factory or your local representative.